


# Single row inch size TRB

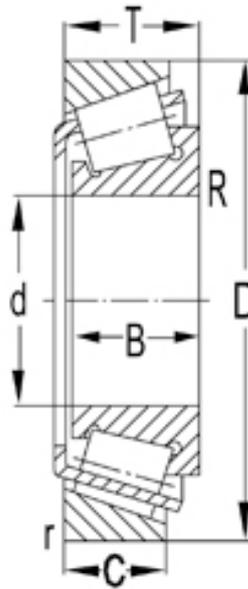

auswählen	Anfrage Lagernummer:		Grenzabmessungen (mm)			Tragzahlen (kN)		Pu	Begrenzung der Geschwindigkeit (U/min)		Gewicht Kg
			D	D	T	Dynamisch (Cr)	Statisch (Kor)		Speed Ratings	Geschwindigkeitsbegrenzung	
03062/03162/Q	15,875	41,275	14,288	25,5	21,2	2,16	15000	20000	0,090		
11590/11520/Q	15,875	42,862	14,288	17,6	17,6	1,83	12000	17000	0,10		
LM11749/710/Q	17,462	39,878	13,843	24,5	20,8	2,12	15000	20000	0,081		
LM11749/710/QVC027	17,462	39,878	13,843	24,5	20,8	2,12	15000	20000	0,081		
LM11949/910/Q	19,050	45,237	15,494	31,5	27,5	29	13000	18000	0,12		
09067/09195/Q	19,050	49,225	19,845	39,1	40	4,3	11000	17000	0,17		
09074/09195/QVQ494	19,050	49,225	19,845	39,1	40	4,3	11000	17000	0,18		
LM12748/710	21,430	45,237	15,494	27,5	31	3,2	11000	17000	0,12		
M12649/610/Q	21,430	50,005	17,526	42,5	38	4,15	12000	16000	0,17		
LM12749/710/Q	21,986	45,237	15,494	31,5	31	3,2	12000	17000	0,12		
LM12749/711/Q	21,986	45,974	15,494	31,5	31	3,2	12000	17000	0,12		
1380/1328/Q	22,225	52,388	19,368	48	44	4,8	11000	15000	0,20		
07100S/07210X/Q	25,400	50,800	15,011	32	30,5	3,15	11000	15000	0,13		
15578/15520	25,400	57,150	17,462	40,2	45,5	4,9	9000	13000	0,23		
M84548/2/510/2/QVQ506	25,400	57,150	19,431	45,5	45	5	10000	13000	0,23		
15101/15245	25,400	62	19,050	48,4	57	6,2	9500	14000	0,31		
15103S/15243/Q	26,157	61,912	19,050	56	57	6,2	9000	12000	0,29		
15103S/15245/Q	26,157	62	19,050	56	57	6,2	9000	12000	0,29		
L44649/610/Q	26,988	50,292	14,224	30	30	3,05	11000	15000	0,11		
1982F/1924A/QVQ519	27,500	57,150	19,845	52	51	5,6	10000	13000	0,22		
1985/1922/Q	28,575	57,150	19,845	54	55	6	10000	13000	0,22		
1988/1922/Q	28,575	57,150	19,845	47,3	55	6	9000	13000	0,22		
M86647/610/QCL7C	28,575	64,292	21,433	56	61	6,8	8500	11000	0,35		
02872/02820/Q	28,575	73,025	22,225	99	140	15	7000	10000	1,05		
L45449/410/Q	29,000	50,292	14,224	30	32,5	3,35	11000	14000	0,11		
M86649/2/610/2/QVQ506	30,162	64,292	21,433	56	61	6,8	8500	11000	0,33		

## Single row inch size TRB

---

M88043/010/2/QCL7C	30,162	68,262	22,225	63	69,5	7,8	8000	11000	0,41
15123/15243/Q	31,750	61,912	19,050	56	57	6,2	9000	12000	0,24
15123/15245/Q	31,750	62	19,050	56	57	6,2	9000	12000	0,24
HM88542/510/Q	31,750	73,025	29,370	70,4	95	10,4	6700	10000	0,62