
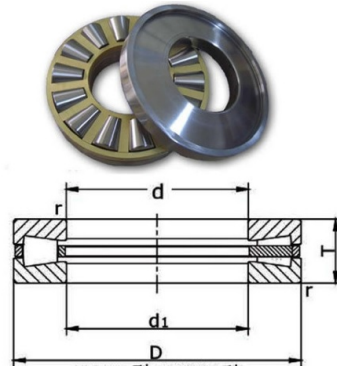


Thrust Tapered Roller Bearing

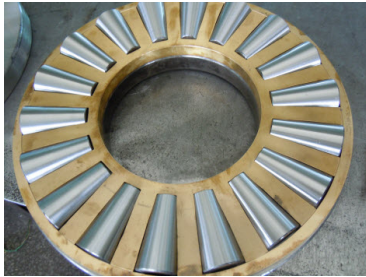

auswählen	Anfrage	Bezeichnung	Hauptabmessungen (mm)			Tragzahlen (KN)		Belastungsgrenze (KN)	Masse (kg)
			D	D	T	Cr	Kor		
		350980 C	170	240	84	330	1290	104	12,5
		353162	180	280	90	561	2400	193	22
		351019 C	220	300	96	440	1660	132	20
		351182 C	240	320	96	418	1900	143	21,5
		353005	250	380	100	897	4550	335	43,5
		350981 C	260	360	92	605	2600	193	28
		351164 C	270	450	180	1650	6000	455	120
		353194	305,07	530	200	2380	10600	680	185
		353102 A	320	440	108	990	5000	335	48,5
		350982 C	320	470	130	1300	5700	405	80
		351100 C	350	490	130	1170	5100	345	73,5
		353006	350	540	135	1720	9150	620	115
		351175 C	380	560	130	1790	10000	670	110
		353204	380	650	215	3360	16600	1060	275
		353106	400	650	200	2700	13700	815	235
		353106 C	400	650	200	2700	13700	815	235

Thrust Tapered Roller Bearing

353106 D	400	650	200	2700	13700	815	230
351121 C	420	620	170	2420	12200	800	185
353152	440	645	167	1980	10800	695	190
350916 D	450	645	155	1980	10800	695	170
353151	470	720	200	3410	17600	1100	285
351301 C	470	720	200	3410	17600	1100	285
351475 C	530	710	218	2200	11000	695	245
350976 C	550	760	230	2920	13200	830	310
350824	600	880	290	4730	21200	1270	550
350901 C	600	910	290	4730	21200	1270	655
351761 A	670	900	230	3580	19000	1120	425
T661	170	-	305	-	-	560	21.4
68TR	174.625	-	358.775	-	-	480	42.8
T709	177.8	-	43.8	-	-	400	83.4