


# Rotary Shaft Seal

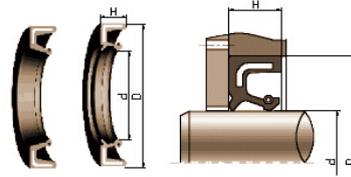

| auswählen Anfrage | Achse<br>und<br>Blende | Toleranz der<br>Wellenhülsenöffnung | Passende<br>Achsentoleranz | Toleranz des<br>Außendurchmessers der<br>Öldichtung<br>Verpackung<br>Metallschale Kunststoffschale |
|-------------------|------------------------|-------------------------------------|----------------------------|--|
| 6.01□10.<br>00    | 0.022                  | -0.09                               | +0.07/+0.18                | +0.12/+0.27  |
| 10.01□18<br>.00   | 0.027                  | -0.11                               | +0.07/+0.18                | +0.12/+0.27  |
| 18.01□30<br>.00   | 0.033                  | -0.13                               | +0.08/+0.20                | +0.15/+0.30  |
| 30.01□50<br>.00   | 0.039                  | -0.16                               | +0.08/+0.20                | +0.15/+0.30  |
| 50.01□80<br>.00   | 0.046                  | -0.19                               | +0.09/+0.23                | +0.17/+0.32  |
| 80.01□12<br>0.00  | 0.054                  | -0.22                               | +0.10/+0.25                | +0.20/+0.35  |
| 120.01□1<br>80.00 | 0.063                  | -0.25                               | +0.11/+0.28                | +0.22/+0.40  |
| 180.01□2<br>50.00 | 0.072                  | -0.29                               | +0.13/+0.31                | +0.25/+0.45  |
| 250.01□3<br>15.00 | 0.081                  | -0.32                               | +0.15/+0.35                | +0.28/+0.50  |
| 315.01□4<br>00.00 | 0.089                  | -0.36                               | +0.18/+0.40                | +0.30/+0.55  |
| 400.01□5<br>00.00 | 0.097                  | -0.4                                | +0.20/+0.45                | +0.33/+0.60  |